

SOS Locator **ALIGATOR**




A320 – We begin

Contents

Contents.....	2
Mobile controls.....	3
Putting into operation.....	5
Switch On / Off.....	8
Keypad Lock.....	9
Charging.....	9
Making calls.....	12
Emergency call.....	15
Flashlight.....	17
Safety instructions.....	18
Used electric device.....	19
Battery liquidation.....	20

Mobile Controls

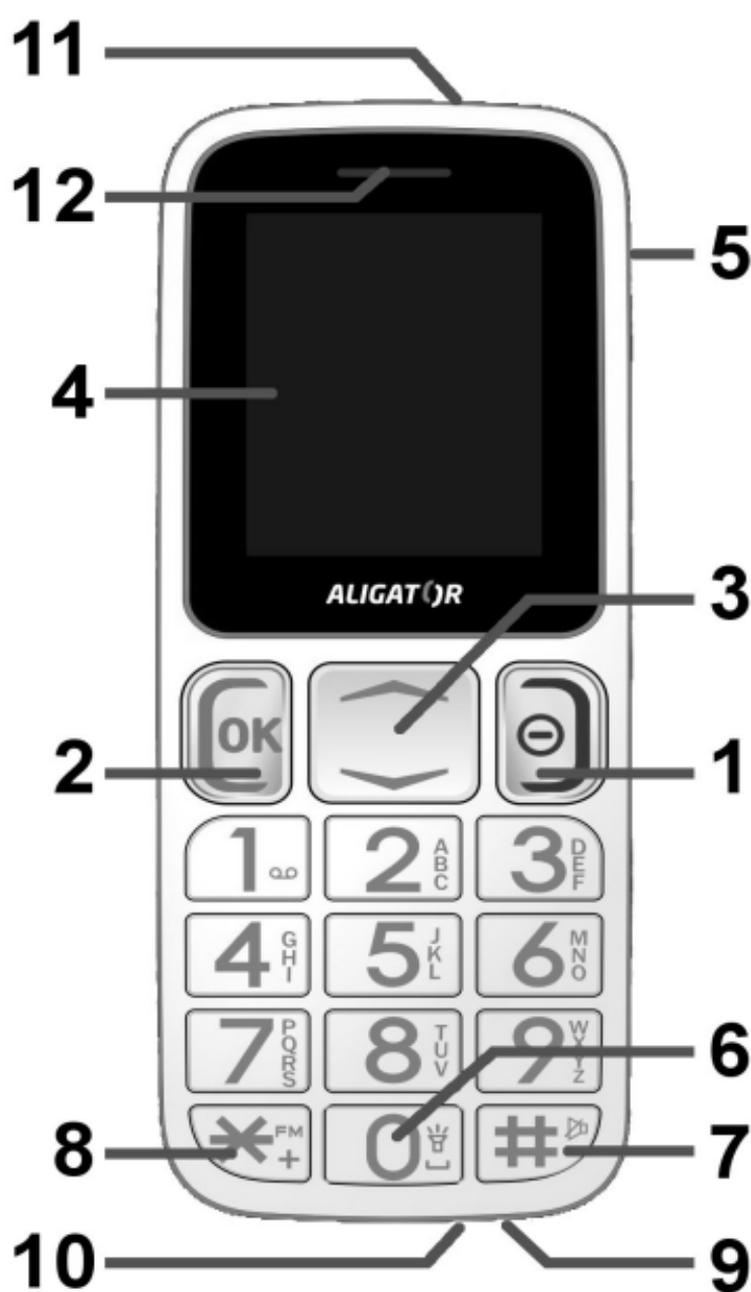


1	Right, red button
2	Left, green button
3	Navigation button up / down
4	LCD screen
5	Earphone connector
6	Button 0
7	Button #
8	Button *
9	Contacts for charging support
1 0	Connector MicroUSB
1 1	Flashlight
1 2	Earphone

Putting into operation


Insert battery + SIM:

1. Insert your nail at the slot under the battery cover at the bottom corner on the back side of the phone and remove carefully the cover.

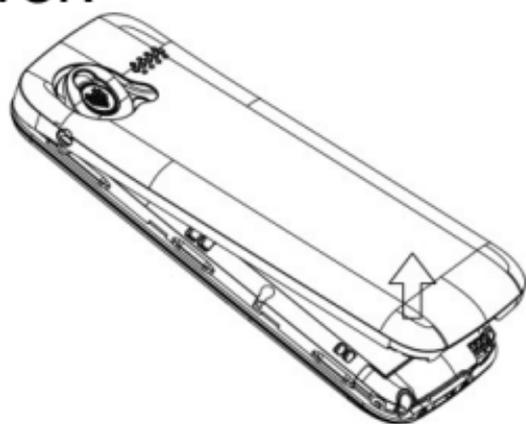

2. Insert 1 or 2 SIM cards (also memory card if you have it). Position for SIM cards is marked by SIM1 and SIM2. Place the

memory card at the slot for SIM 2.

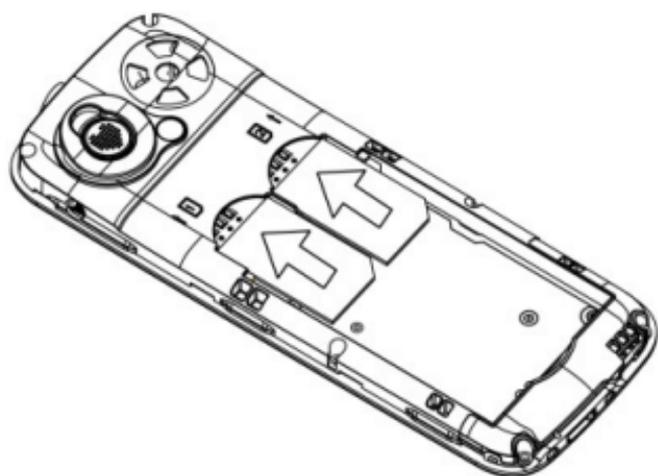

3. Insert the battery.
Three metal contacts must lead to upper part of the mobile phone. Battery must smoothly fit at the battery holder in the mobile phone.

4. Finally put the cover back.

ATTENTION! Switch off the mobile phone and disconnect the charger by any manipulation with the battery, memory card or SIM card. Use only original battery supplied by the mobile producer.

Switch On / Off of the mobile phone



To SWITCH ON the mobile -
press and hold the red
button **(1)**, till the mobile
turns on. (Now you can be
asked to enter the PIN code
in case the PIN protection is
activated).

To SWITCH OFF - press and hold the red button **(1)**, until the mobile turns off.

Before Switching On be sure that the battery is inserted and is charged.

Keypad lock

Mobile phone is provided with the keypad lock which prevents from the unwanted press of the button (f.e. when placed at the pocket). The keypad will automatically close itself after a certain time of inactivity.

To unlock the keypad press the green button **(2)** and immediately the button ***(8)** till the keypad is unlocked.

To lock the keypad press the green button **(2)** and immediately ***(8)** until the keypad is locked.

In case the automatic lock is activated, the keypad will close itself after a certain time of inactivity.

Select following to set up the keypad lock :

Set up ->Telephone

->Display->Screen lock

Charging of mobile

Be sure that the battery is placed at the mobile phone. Connect the charger.

Charging will start automatically. Mobile phone can be charged if it is in switched on or switched off mode.

Charging level is indicated on the mobile screen.

Discharged battery	Fully charged
	

After the battery is fully loaded disconnect always the charger from the network and also from the mobile phone.

Mobile phone will warn you by an acoustic signal and by message on the screen when the battery is almost discharged. In this case charge the battery as soon as possible.

Making a call

Dialling

Insert required phone number on the mobile

keypad and press the green button **(2)**. Mobile will start to dial required number.

If you have 2 SIM cards in your mobile and both are activated, mobile phone will ask you (after pressing of green button) which SIM card should be used for calling.

By using of the button Up/Down **(3)** choose the SIM card and confirm by green button **(2)**.

If you have only 1 SIM card in your mobile, after pressing of green button the mobile

phone will directly dial the required number.

If you have dialled by mistake a wrong number, just press the red button „Delete“ (1) and the last digit will be deleted. If you need to delete the whole number, press the red button (1) for a longer time till the whole number is deleted.

Answer /Reject the Call

For answering of the call press green button (2).

For rejecting of the call, press red button(1).

If somebody is calling, you will see his tel.number on the display. If his number is stored in the contact list you will see his name on the display.

(Function of displaying of the tel.number need not be always available)

Emergency Call

If you are in danger or you need an assistance of your relatives or your medical doctor, press and hold the SOS button placed on the back side of the mobile phone.

Mobile will start automatically to dial pre-set tel.numbers and will send to these numbers an emergency SMS including your localisation on the map.

Attention! You must insert first correct tel.numbers which should be contacted in case of emergency. If you do not insert the tel.numbers the mobile phone will not work properly.

Flashlight

Mobile phone is provided with a flashlight placed on the upper side of the mobile phone. Flashlight can be turned on/off by a long press of the button 0(6) from the main screen.

Flashlight is provided with a very economical light source (LED).

Safety instructions

- Do not switch on and use the mobile phone in the prohibited areas
- Do not use the mobile phone while driving the car
- Turn off the mobile phone near the sensitive medical device
- Turn it off in the aircraft
- Do not use the mobile phone near the filling petrol station
- Turn off the mobile phone always near explosives
- Use always original batteries supplied by the producer (danger of

damage of explosion of the mobile phone)

- Attention! Your mobile phone is NOT waterproof !

Used electric device



Mobile phone is an electronic appliance. It means it must not be manipulated as a common residential waste. **Never throw the**

used device away at the common municipal waste!!!

It must be, after the use, handed over to the appropriate collection point for its recycling and ecological liquidation. Breach of these instructions is not legal. This device may contain the substances dangerous to the environment – it is necessary to handle it in a proper way

to protect it. Please contact your dealer to get more information how to handle the used product.

Battery liquidation



Used/old batteries and accumulators do not belong to the common residential waste !!! They

may contain the substances dangerous to the environment. Hand over the battery to the respective collection point which provides the ecological liquidation. Please contact your dealer to get more information how to handle the used product.

Handling with the used batteries in contradiction with given instructions is illegal!

CE 0700

Importer:

www.aligator.cz

Copyright © 2015 ADART COMPUTERS s.r.o.